KENWOOD KD-7010

MODEL

DIAGRAM MANUAL

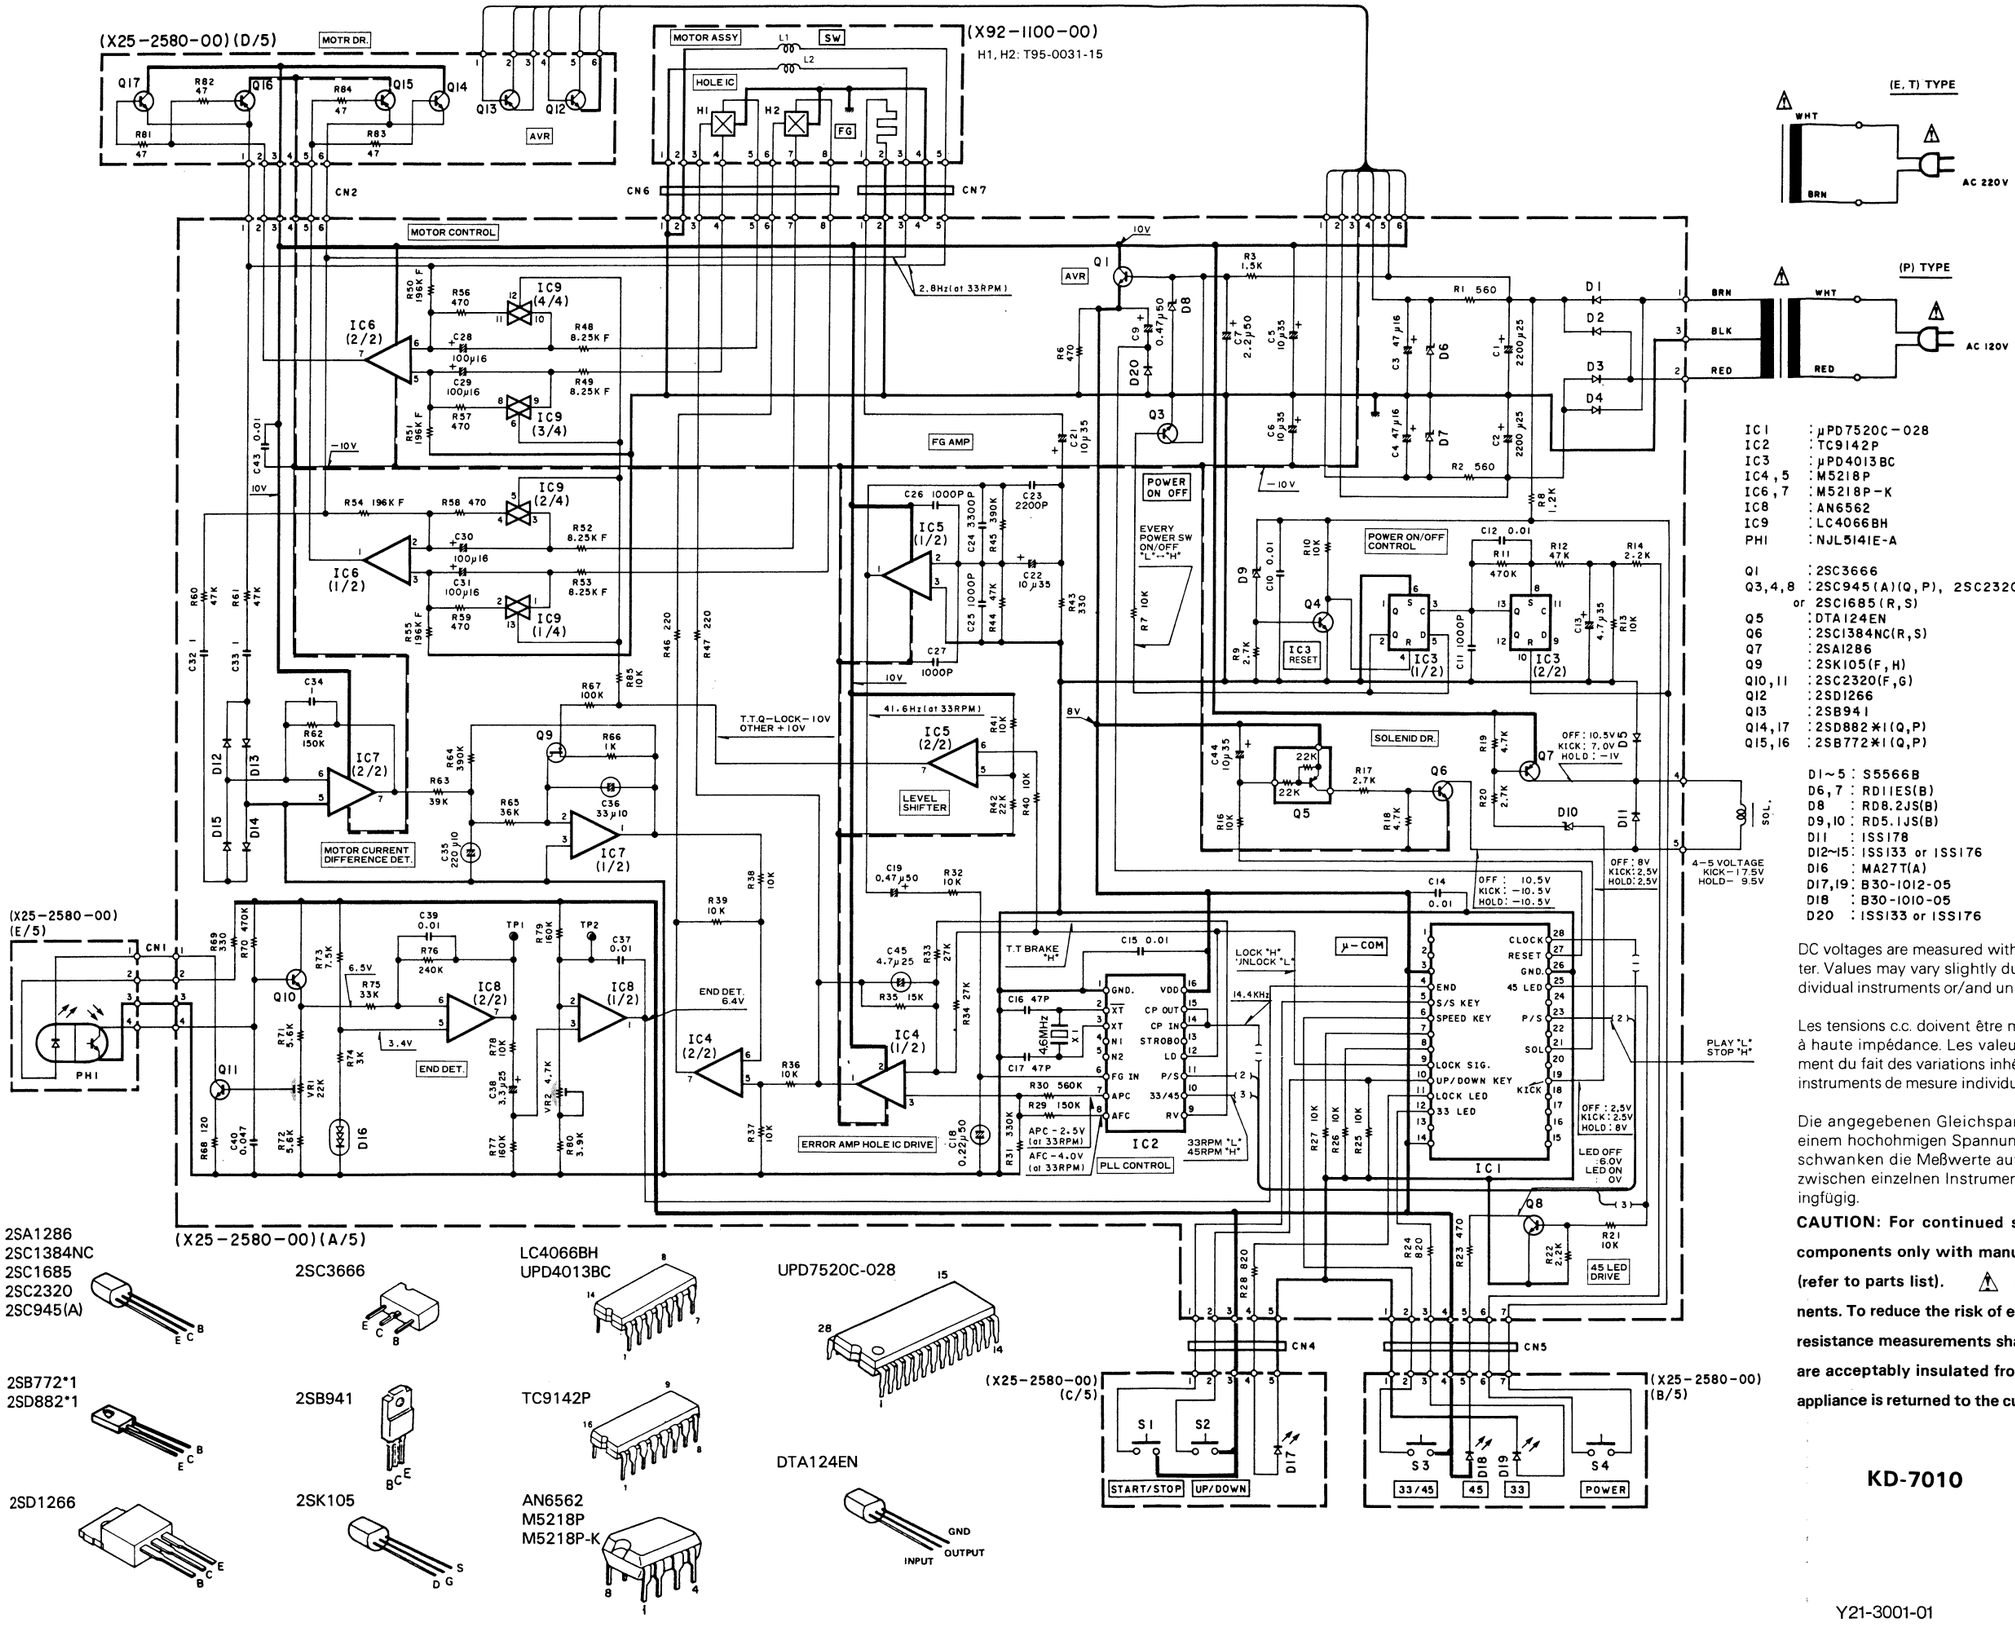

IC1 : μPD7520C-028
IC2 : TC9142P
IC3 : μPD4013BC
IC4,5 : M5218P
IC6,7 : M5218P-K
IC8 : AN6562
IC9 : LC4066BH
PH1 : NJL5141E-A

Q1 : 2SC3666
Q3,4,8 : 2SC945(A)(Q,P), 2SC2320(E,F) or 2SC1685(R,S)
Q5 : DTA124EN
Q6 : 2SC1384NC(R,S)
Q7 : 2SA1286
Q9 : 2SK105(F,H)
Q10,11 : 2SC2320(F,G)
Q12 : 2SD1266
Q13 : 2SB941
Q14,17 : 2SD882*1(Q,P)
Q15,16 : 2SB772*1(Q,P)

D1~5 : S5566B
D6,7 : RD11ES(B)
D8 : RD8.2JS(B)
D9,10 : RD5.1JS(B)
D11 : 1SS178
D12~15: 1SS133 or 1SS176
D16 : MA27T(A)
D17,19: B30-1012-05
D18 : B30-1010-05
D20 : 1SS133 or 1SS176

DC voltages are measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

KD-7010

Y21-3001-01

KD-7010
KENWOOD

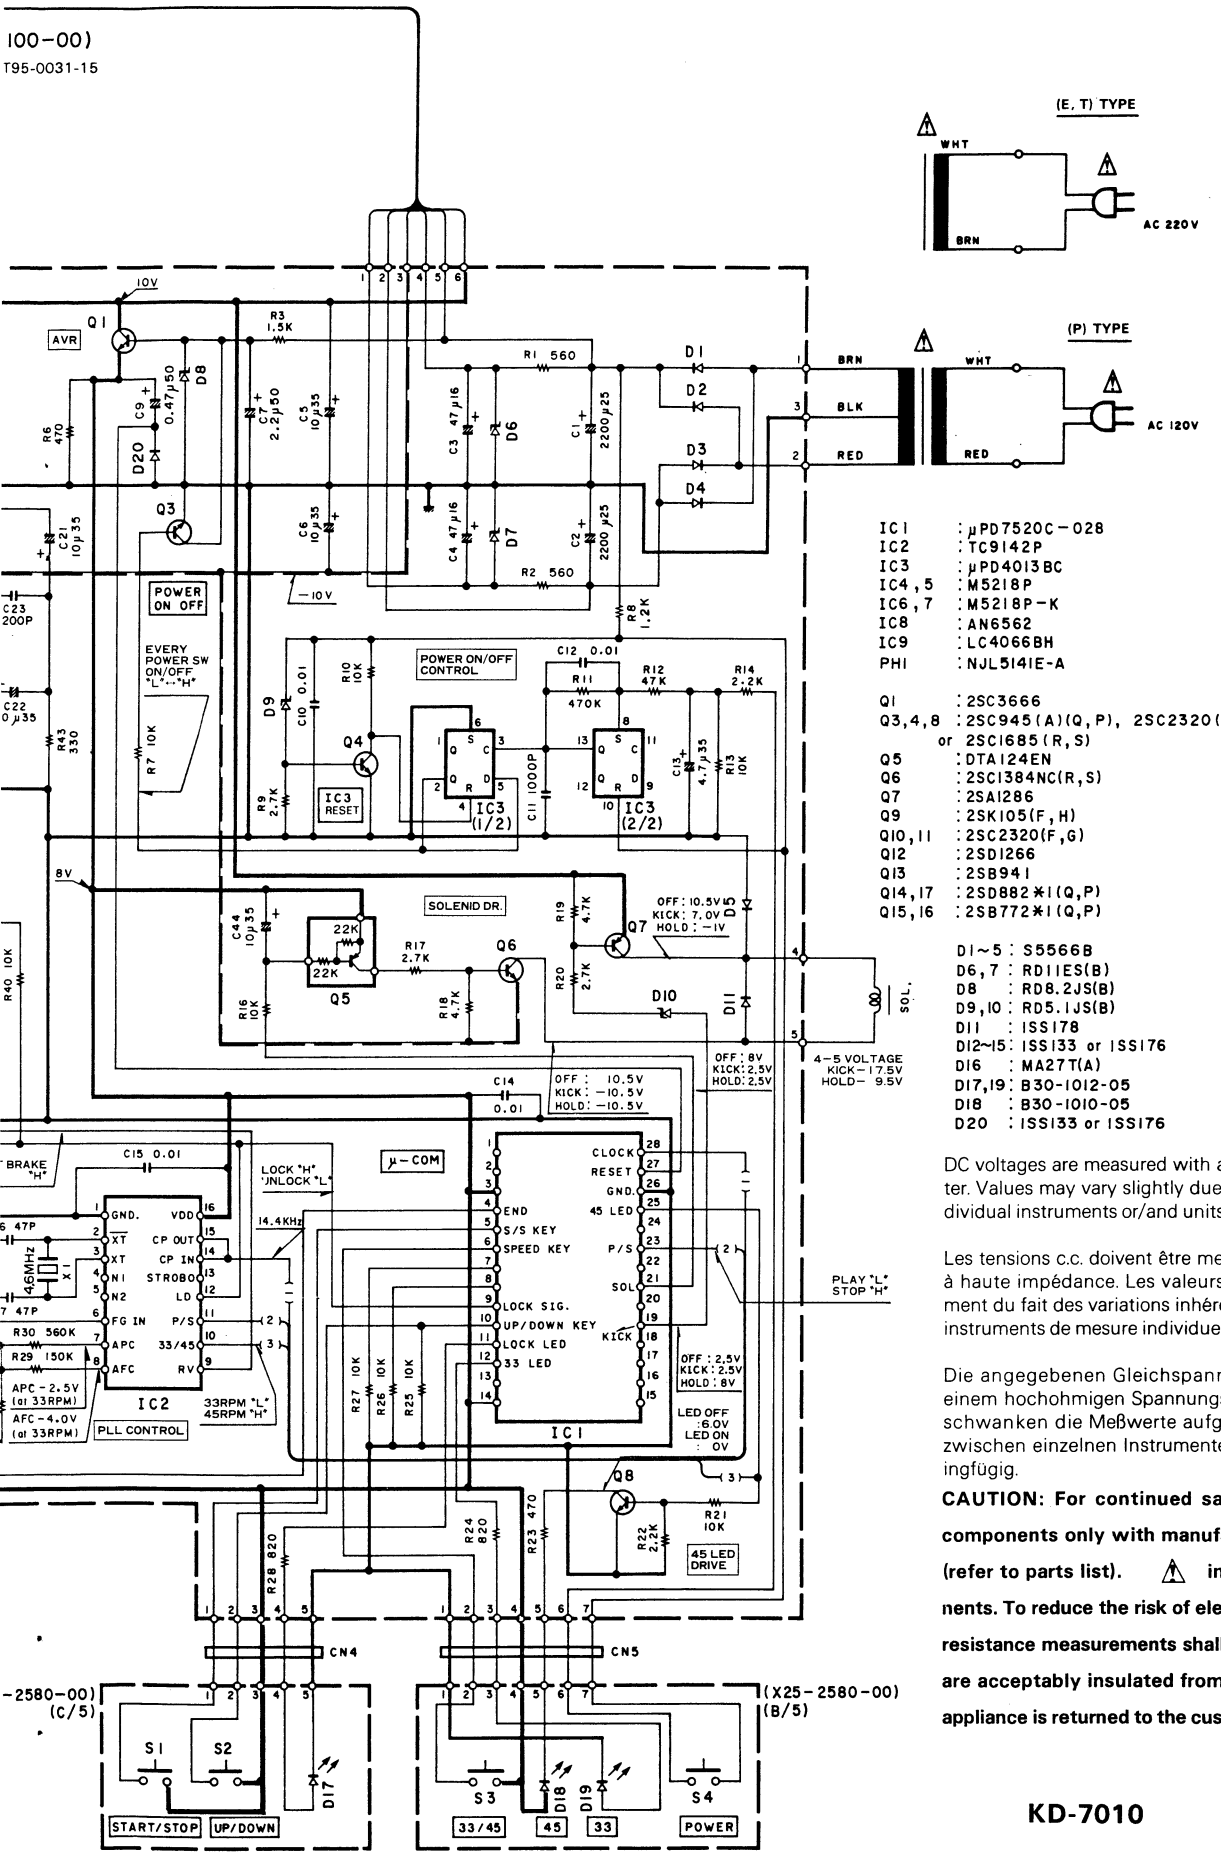

IC1 : µPD7520C-028
IC2 : TC9142P
IC3 : µPD4013BC
IC4,5 : M5218P
IC6,7 : M5218P-K
IC8 : AN6562
IC9 : LC4066BH
PHI : NJL5141E-A

Q1 : 2SC3666
Q3,4,8 : 2SC945(A)(Q,P), 2SC2320(E,F) or 2SC1685(R,S)
Q5 : DTA124EN
Q6 : 2SC1384NC(R,S)
Q7 : 2SA1286
Q9 : 2SK105(F,H)
Q10,11 : 2SC2320(F,G)
Q12 : 2SD1266
Q13 : 2SB941
Q14,17 : 2SD882*1(Q,P)
Q15,16 : 2SB772*1(Q,P)

D1~5 : S5566B
D6,7 : RD11ES(B)
D8 : RD8.2JS(B)
D9,10 : RD5.1JS(B)
D11 : 1SS178
D12~15 : 1SS133 or 1SS176
D16 : MA27T(A)
D17,19 : B30-1012-05
D18 : B30-1010-05
D20 : 1SS133 or 1SS176

DC voltages are measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

KD-7010

Y21-3001-01

KD-7010
KENWOOD